
## APPENDIX 11 - TRS 16.08 ECE 3 & 4 POINT ROAD APPROVED 50MM/50MM HARNESS

**RMP.10** 

Date:		Harness Specification Sheet				
Dealer Name:		Customer Notes:				
Customer Name:						
Daytime Contact No:						
Email Address:						
Approval Type:	Qty required:	Colour:				
Make of Vehicle:	Type:	Year	:			
Shoulder strap measurements "A" should be taken with driver seated in vehicle with harness fastened tight.  TRS Technical Tip: Shoulder measurements "A" under 65cm TRS recommend a Sewn Bearing Point						
Sewn Bearing Point	Threaded Anchor Point with Bar Slide					
A 28cm Standard	A 28cm Standard	cent	h A: cm n centre of anchor mounting point to cre of adjuster			
Shoulder Adjuster (Mark appropriate box)  TRS Technical Tip: TRS Recommend the aluminium adjuster for fast and easy adjustment						
50mm Steel Adjuster		50mm Aluminium Adjuster 🗌				
"B" is	Lap Straps - Measurements should be taken with the harness fastened tight and adjustment in midway position.  "B" is 65cm as standard from centre of anchor mounting to centre of release buckle.  "C" is 12cm as standard from centre of mounting strap to centre of adjuster.					
Pull Up (STD Direction)	B B	C   C   C   C   C   C   C   C   C   C	Length B: (Overall Length) cm  Length C: cm (Adjuster Length)			
Pull Down (Suited for tight cockpits i.e. Kit Car)	B		Length B: (Overall Length) cm  Length C: cm (Adjuster Length)			
Lap Adjuster (Mark appropriate box)  TRS Technical Tip: TRS Recommend the aluminium adjuster for fast and easy adjustment						
	Adjuster	50mm Aluminium Adjuster   50mm Stand easy adjustment				



**RMP.10** 

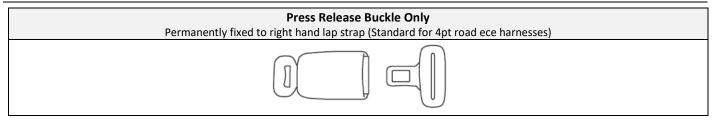

Sewn appropr			
Sewn Snap Hook	Sewn 11mm Bolt in Plate	Sewn 15mm Bolt in Plate	
			Shoulder Straps
			Lap Straps

Threaded Anchorages - Mark appropriate boxes to							
Snap Hook + 3 Bar Slide	11mm Bolt in Plate + 3 Bar Slide	15mm Bolt in Plate + 3 Bar Slide	Wrap Around				
				Shoulder Strap			
				Lap Straps			